


| Qty. | Description |
|------|-------------|
|------|-------------|

| | |
|---|----------|
| 1 | CONLIFT1 |
|---|----------|



Note! Product picture may differ from actual product

Product No.: [97936156](#)

Grundfos Conlift1 are condensate removal pump solutions designed for pumping of condensate that is collected below sewer level or which cannot flow to the sewage system or drain of the building by means of a natural downward slope.

The solutions are suitable for the pumping of condensate from air-conditioning systems, cooling and refrigeration systems, air dehumidifiers and evaporators.

It is also suitable for condensate boilers and condensate with a pH value above 2.5.

For condensate with a pH value below 2.5, we offer the pH+ box neutralisation unit as accessory.

Features and benefits:

- Fully sealed against moisture and evaporation.
- Quick and easy installation.
- Very silent and smooth operation.
- Can be mounted on the floor or on a wall.
- Pre-assembled non-return valve.
- Pump operation test button.
- Incorporates high-water float switch.
- Fully automatic operation.
- Inlet and discharge hose connectors included.



Company name:


Created by:

Phone:




Date:

13/06/2024




97936156 CONLIFT1 50 Hz

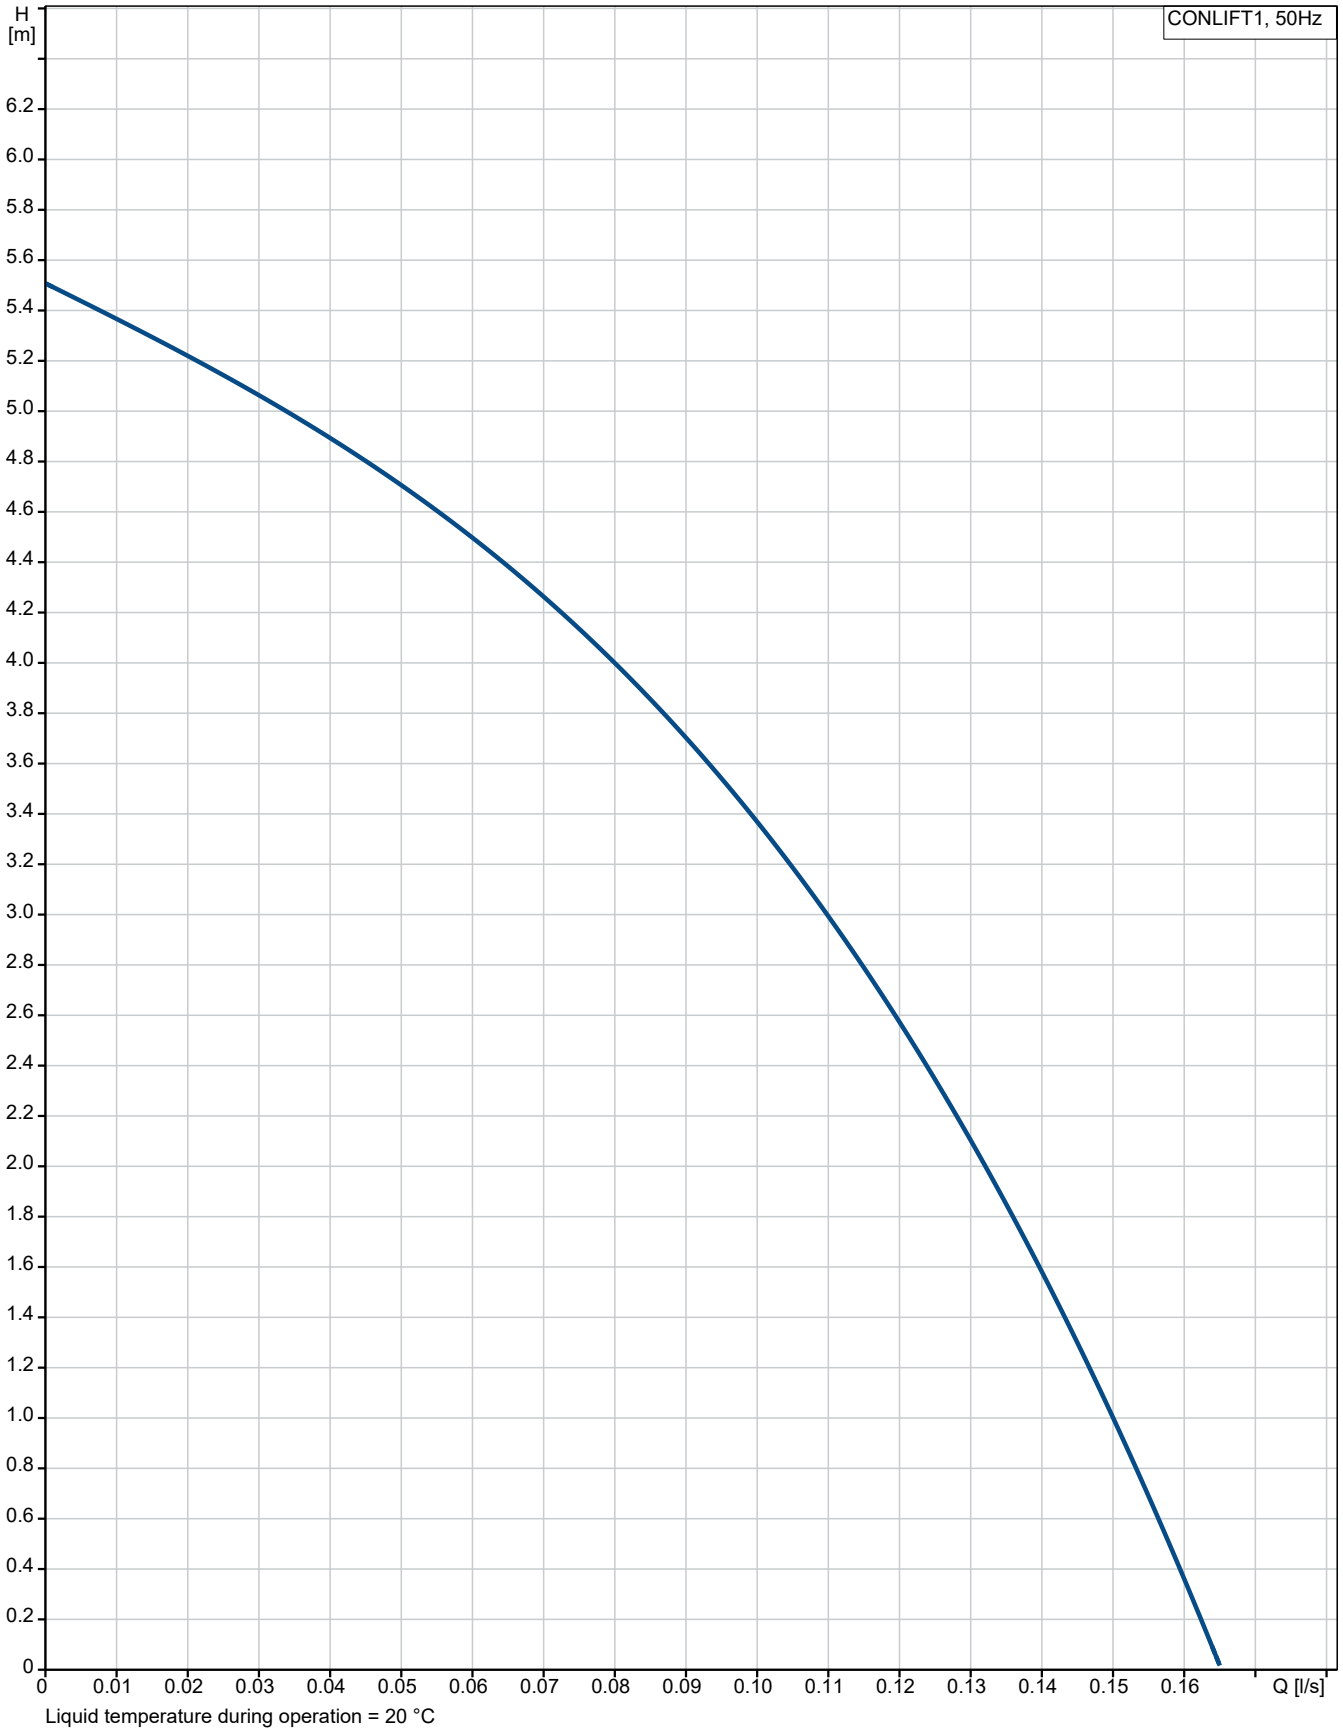

| Description | Value |
|------------------------------|-------------------------|
| General information: | |
| Product name: | CONLIFT1 |
| Product No: | 97936156 |
| EAN number: | 5710626733828 |
| Price: | EUR 195 |
| Technical: | |
| Maximum flow: | 0.163 l/s |
| Maximum head: | 5.7 m |
| Materials: | |
| Pump housing: | Composite |
| Installation: | |
| Type of inlet connection: | 18-32 |
| Type of outlet connection: | 8-10 |
| Liquid: | |
| Maximum liquid temperature: | 50 °C |
| Selected liquid temperature: | 20 °C |
| Density: | 998.2 kg/m ³ |
| Min. pH-value: | 2.7 |
| Electrical data: | |
| Power input P1: | 75 W |
| Mains frequency: | 50 Hz |
| Rated voltage: | 1 x 230 V |
| Rated current: | 0.65 A |
| Enclosure class (IEC 34-5): | IP24 |
| Insulation class (IEC 85): | F |
| Power cable type: | H05W-F36 |
| Length of power cable: | 1.7 m |
| Power plug: | Schuko plug |
| Controls: | |
| Type of connector: | Type F (CEE7/4) |
| Tank: | |
| Total volume of tank(s): | 2.65 l |
| Others: | |
| Net weight: | 4.1 kg |
| Gross weight: | 4.3 kg |
| Sales region: | Europe |
| Danish VVS No.: | 385651100 |
| Finnish LVI No.: | 4965326 |
| Norwegian NRF no.: | 9045396 |
| Country of origin: | CN |
| Custom tariff no.: | 84137021 |
| Environmental approvals: | WEEE |

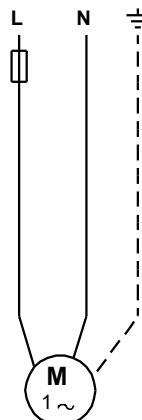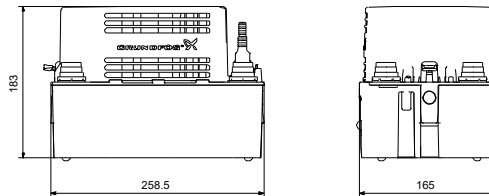


97936156 CONLIFT1 50 Hz

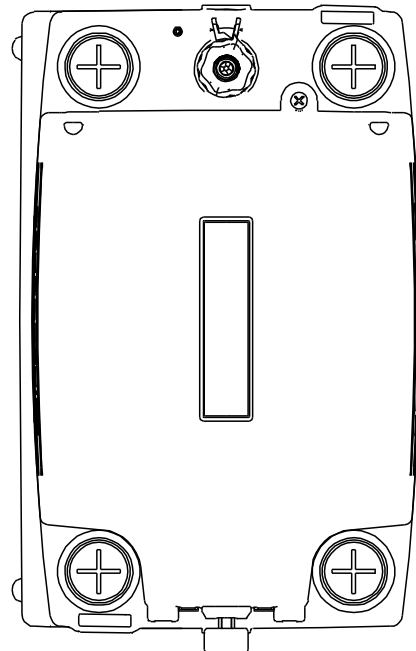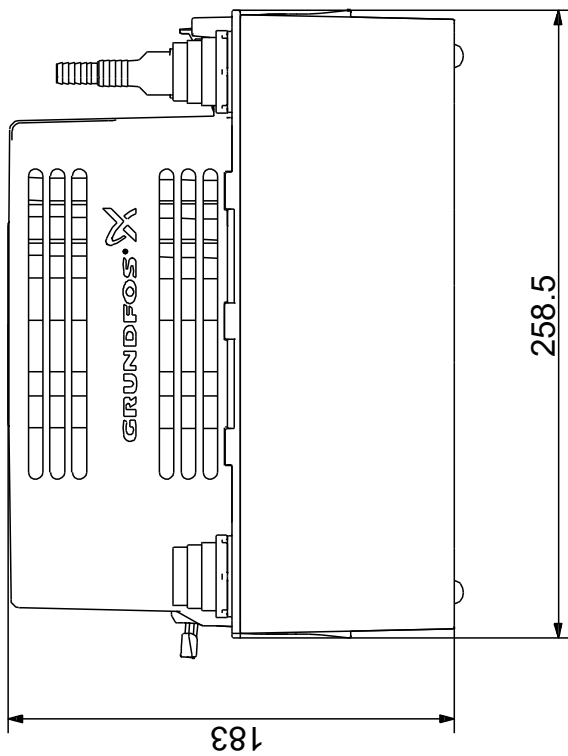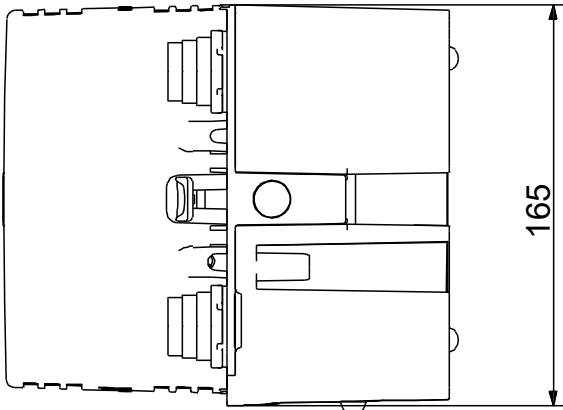

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

97936156 CONLIFT1 50 Hz

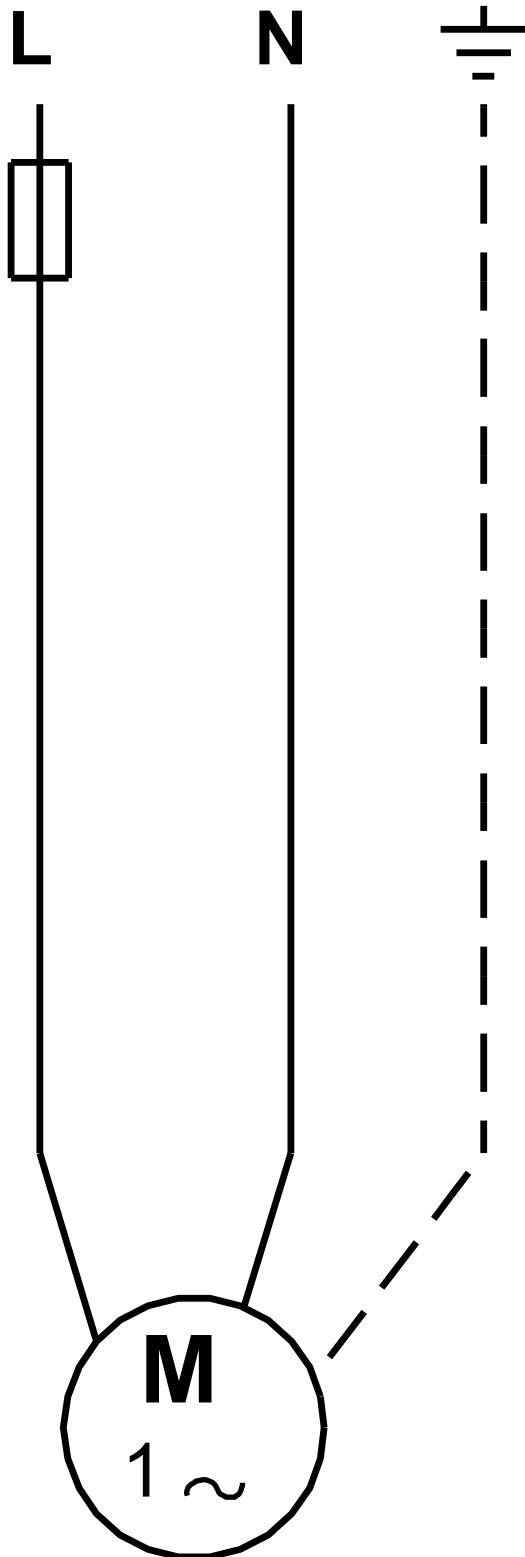

Note! All units are in [mm] unless others are stated.