




Company name: Created by: Phone:

Date:

24/11/2023


99221292 MAGNA1 40-60 F

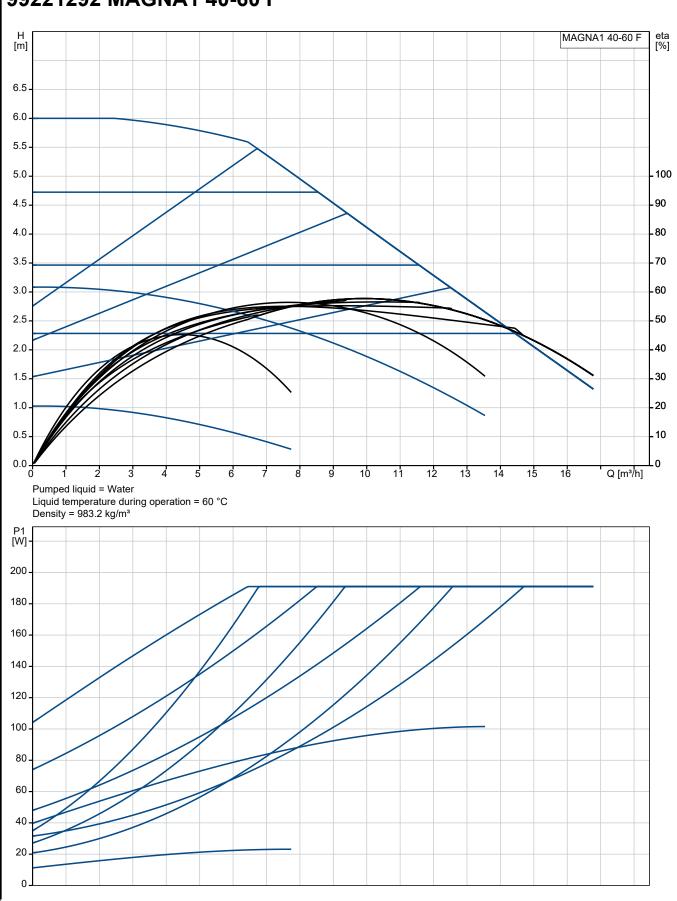






Company name: Created by: Phone:

| Description | Value |
|---------------------------------|----------------------------------------------|
| General information: | Value |
| Product name: | MAGNA1 40-60 F |
| Product No: | 99221292 |
| EAN number: | 5712608942655 |
| Technical: | |
| Maximum head: | 60 dm |
| TF class: | 110 |
| Approvals: | CE,VDE,EAC,MOROCCO,UKCA, TSE,RCM,UkrSEPRO |
| Model: | С |
| Materials: | |
| Pump housing: | Cast iron |
| Pump housing: | EN 1561 EN-GJL-250 |
| Pump housing: | ASTM A48-250B |
| Impeller: | Composite |
| Installation: | |
| Range of ambient temperature: | 0 40 °C |
| Maximum operating pressure: | 10 bar |
| Type of connection: | DIN |
| Size of connection: | DN 40 |
| Pressure rating for connection: | PN 6/10 |
| Port-to-port length: | 220 mm |
| Liquid: | |
| Pumped liquid: | Water |
| Liquid temperature range: | -10 110 °C |
| Selected liquid temperature: | 60 °C |
| Density: | 983.2 kg/m³ |
| Electrical data: | |
| Maximum power input - P1: | 194 W |
| P1 min.: | 12 W |
| Mains frequency: | 50 / 60 Hz |
| Rated voltage: | 1 x 230 V |
| Minimum current consumption: | 0.11 A |
| Maximum current consumption: | 1.56 A |
| Enclosure class (IEC 34-5): | X4D |
| Insulation class (IEC 85): | F |
| Others: | |
| Energy (EEI): | 0.20 |
| Net weight: | 9.57 kg |
| Gross weight: | 10.2 kg |
| Shipping volume: | 0.016 m³ |
| Finnish LVI No.: | 4615319 |
| Environmental approvals: | CN ROHS,WEEE |

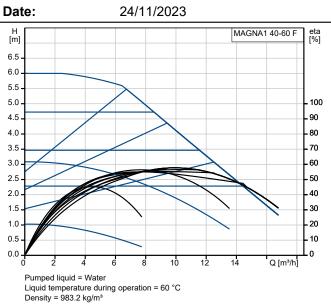

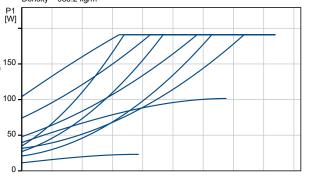

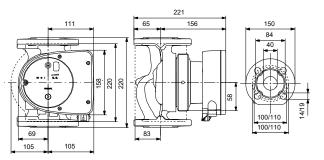








Company name: Created by: Phone:

Date:

24/11/2023

99221292 MAGNA1 40-60 F

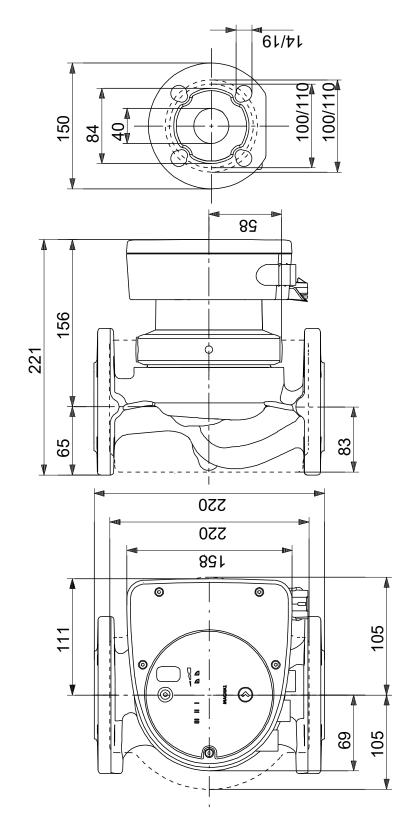

Note! All units are in [mm] unless others are stated. Disclaimer: This simplified dimensional drawing does not show all details.