

Qty. Description

1 CONLIFT2



Note! Product picture may differ from actual product

Product No.: [97936158](#)

Conlift2

Applications

The Conlift2 is designed for a higher safety level than Conlift1. It comes with an integrated alarm device offering acoustic alarm when the high-water level is reached and the possibility of switching the boiler source off or starting the pump to keep the boiler running until service can be performed.

Typical applications:

- Condensate boilers.
- For condensate with a pH value above 2.5.
- For condensate from air-conditioning systems, cooling and refrigeration systems, air dehumidifiers and evaporators.
- For condensate with a pH value below 2.5, use Conlift2 pH+.

Features

- Fully sealed against moisture and evaporation.
- Quick and easy installation.
- Very silent and smooth operation.
- Can be mounted on the floor or on a wall.
- Pre-assembled non-return valve.
- Pump operation test button.
- Incorporates high-water float switch.
- Acoustic high-water alarm device offering the possibility of starting the pump and/or switching the boiler source off.
- Detects kinked discharge hose.
- Fully automatic operation.
- Inlet and discharge hose connectors included.



Company name:


Created by:

Phone:





Date:

12/07/2024




97936158 CONLIFT2 50 Hz

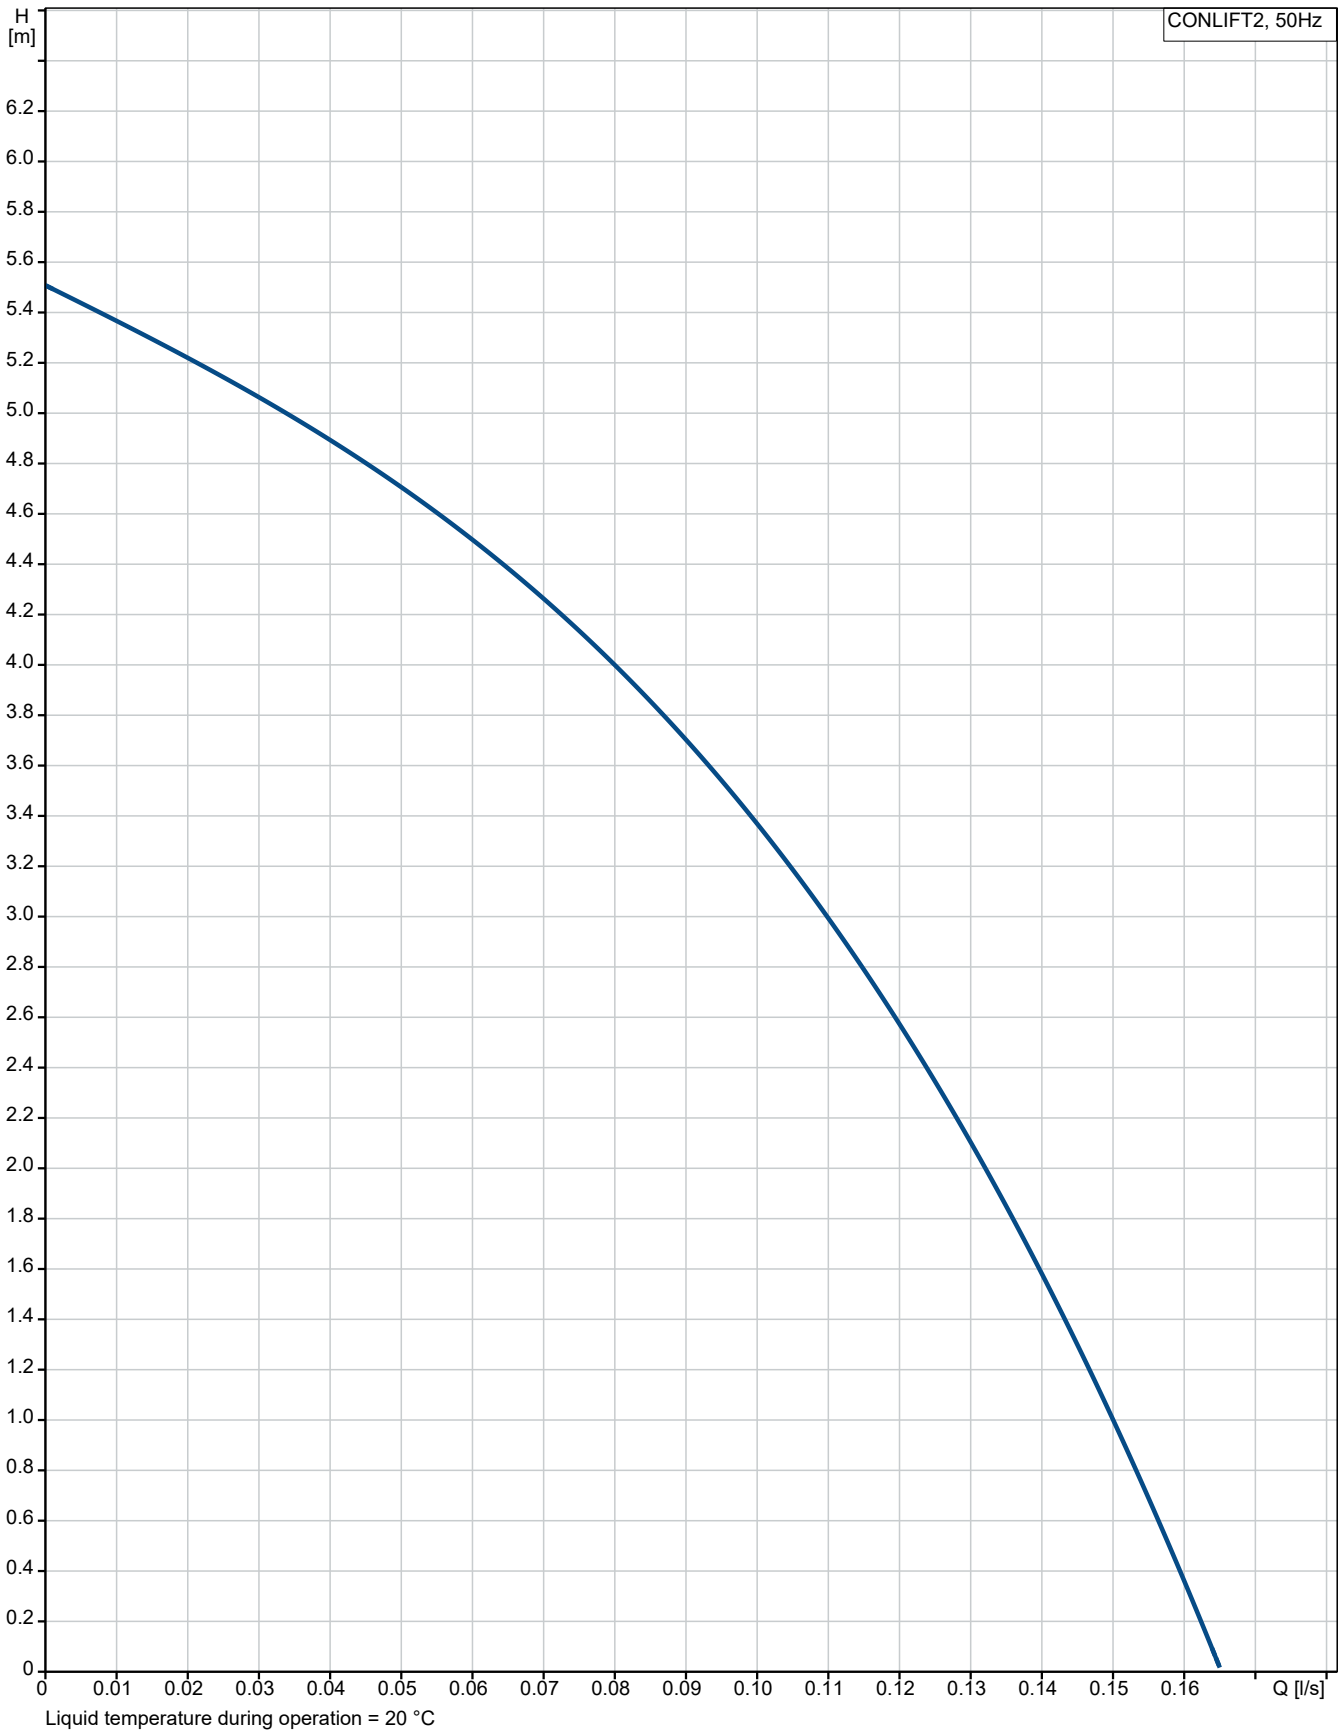

Description	Value
General information:	
Product name:	CONLIFT2
Product No:	97936158
EAN number:	5710626733859
Technical:	
Maximum flow:	0.167 l/s
Maximum head:	5.5 m
Installation:	
Type of inlet connection:	18-30
Type of outlet connection:	8-10
Liquid:	
Maximum liquid temperature:	50 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Min. pH-value:	2.7
Electrical data:	
Power input P1:	75 W
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Rated current:	0.65 A
Enclosure class (IEC 34-5):	IP24
Insulation class (IEC 85):	F
Power cable type:	H05W-F36
Length of power cable:	1.7 m
Power plug:	Schuko plug
Tank:	
Total volume of tank(s):	2.65 l
Others:	
Net weight:	4.2 kg
Norwegian NRF no.:	9045397

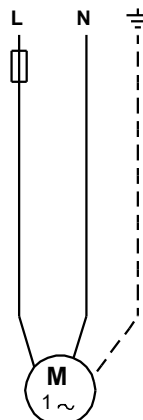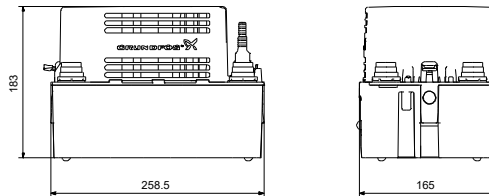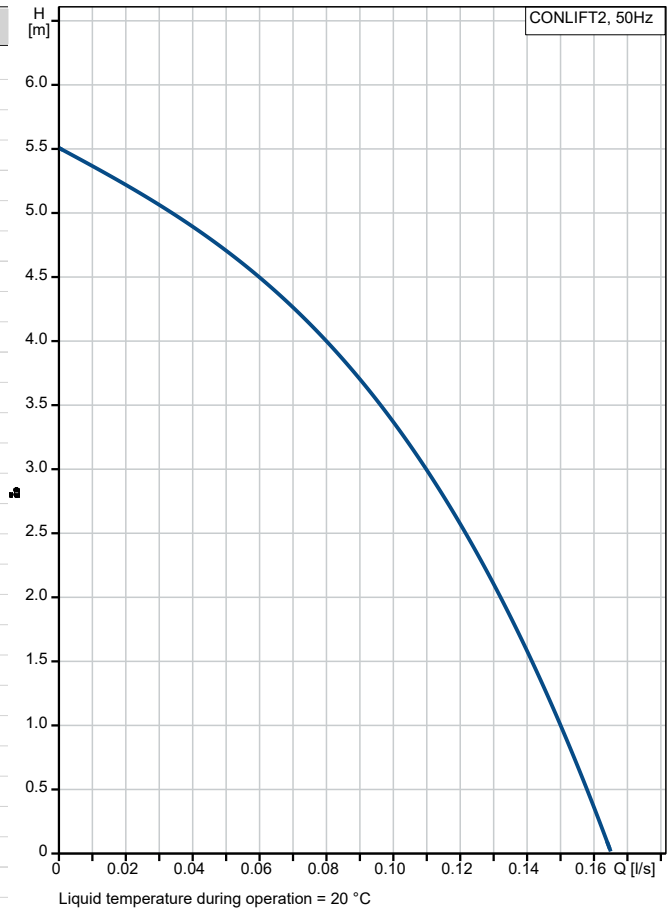


97936158 CONLIFT2 50 Hz

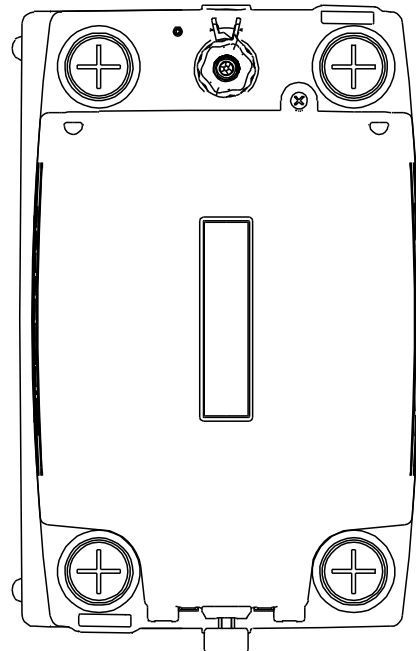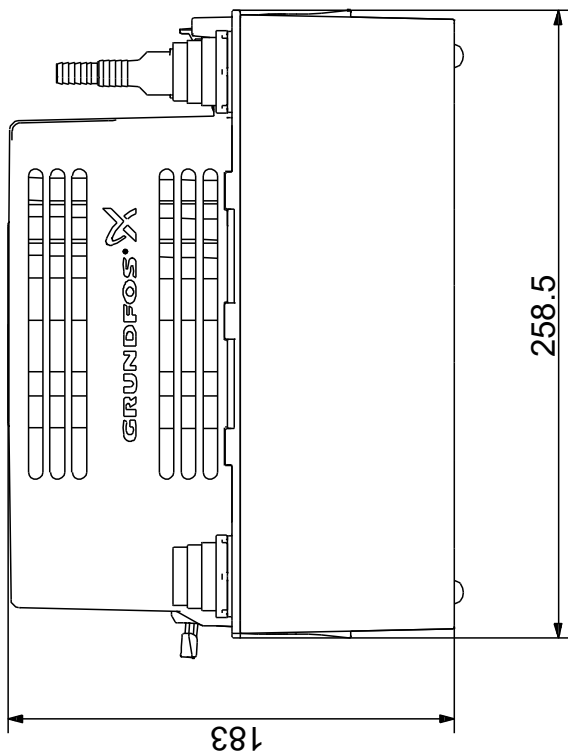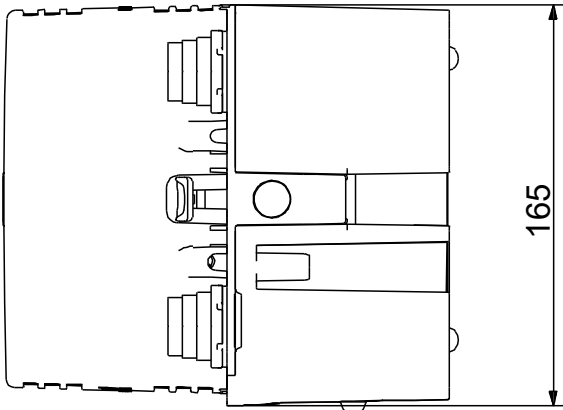

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

97936158 CONLIFT2 50 Hz

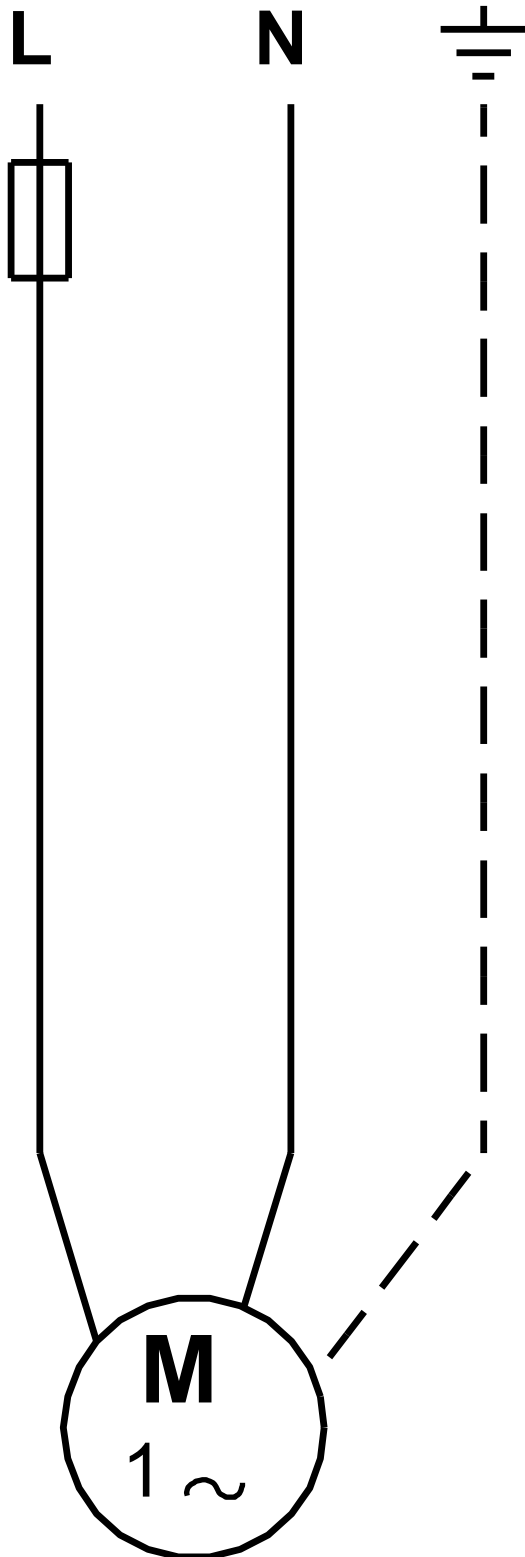

Note! All units are in [mm] unless others are stated.