

Hot pressed brass


TECHNICAL DATA

temperature range : - 10°C up to max. + 100°C, pressure-dependent
 pressure range : max. PN 16 bar, depending on nominal size
 connecting thread : according to DIN ISO 228/1
 body material : CW617N
 sand blasted mattfinished
 lid gasket : PTFE
 strainer : stainless steel
 strainer: \varnothing 0,5 mm
 Other strainer \varnothing on request



For horizontal and vertical instalation

Connecting thread female/female

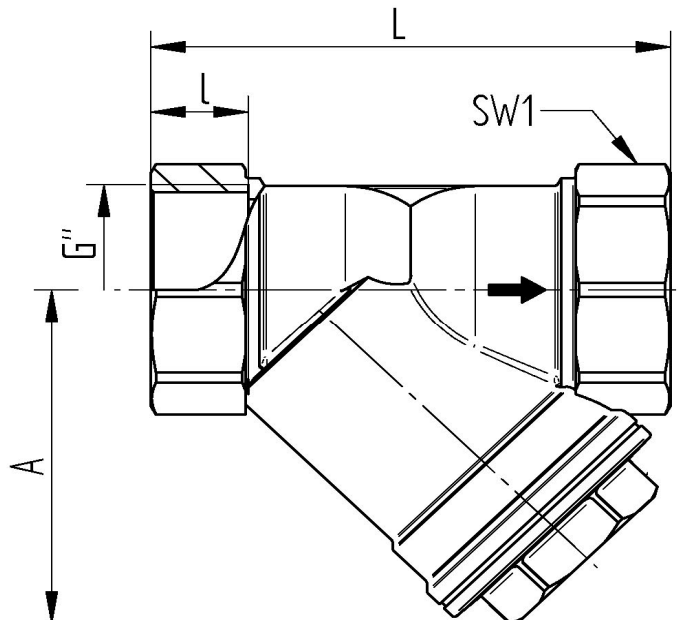

Art. Nr.	G"	\varnothing DN	L mm	l mm	A mm	SW mm	PN bar	weight (g)
1050-02	1/4"	9	46	10	31	20	16	80
1050-03	3/8"	9	46	10	31	20	16	70
1050-04	1/2"	15	56.5	11.5	40	24	16	130
1050-05	3/4"	18	66	12	46	30	16	200
1050-06	1"	20	74	14	52	38	16	290
1050-07	1 1/4"	31	96	15	65	47	16	560
1050-08	1 1/2"	37	104	16	73	54	16	680
1050-09	2"	44	125	18	91	67	16	1200
1050-10	2 1/2"	58	146	19	107	83	16	2560
1050-11	3"	70	170	21	123	96.5	16	2980