## COMBINED PRESSURE AND TEMPERATURE GAUGE



## Nominal Diameter 80 Connection brass Connection position centric back





Good value combined instrument for pressure and temperature measuring. The gauges have an automatic closing valve that makes it possible to exchange the combined pressure and temperature gauge without emtying the heating system.

Туре	4971	Options
Nominal size	80	
Symbol	4	
Accuracy class	Pressure class 1,6 Temperature classe 2,0	
Ranges	0 4 bar / 0120°C 0 6 bar / 0120°C 010 bar / 0120°C 016 bar / 0120°C 016 bar / 0160°C	More on request
Application	Constant load:3/4 x end of scale valueAlternating load:2/3 x end of scale value	
Case	Sheet steel, black	
Ring	Slip ring, brass chromium –plated	
Pressure connection	Brass, G1/2	Other on request
Connection position	centric back	radial bottom
Movement	CuZn alloy	
Measuring element	Bronze, thermobimetal	
Window	Flat instrument glass	Glass
Dial	Aluminium white, lettering black, red and blue marking	Special scale
Pointer	Aluminium black	Red mark pointer
Plain stem length	20 mm	
Weight	approx. 0,300 kg	

Dimensions in mm



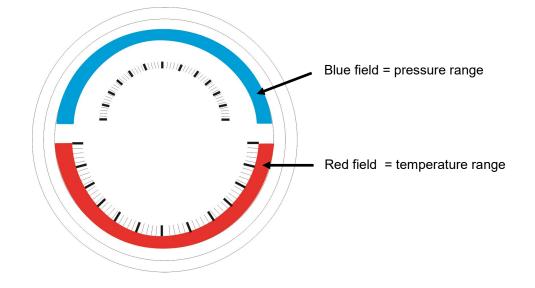



SUKU Druck- und Temperaturmesstechnik GmbH

Garnsdorfer Hauptstraße 109 • 09244 Lichtenau / Sachsen - GERMANY Tel.:+49 37208 / 2717 • Fax:+49 37208 / 61713 • contact@suku.de • www.suku.de